



LINYI WELLSIMP&EXP CO.LTD

Add: Room 1104,B-Building,Yigao Shanghai Jie,Linyi City,China

Tel: 0086-539-8010607 Fax: 0086-539-8010607

Mobile: 13792415765 (viber,WhatsApp,,We chat no)

<http://wellsd.en.alibaba.com> www.wellsxgt.com

<https://wellsliftfactory.com/>

Email: gl@wellsxgt.com skype: kkglsky


LINYI WELLS IMP&EXP CO.,LTD

World Class Lifting Solutions



20
YEARS

www.wellsxgt.com
<https://wellsliftfactory.com/>

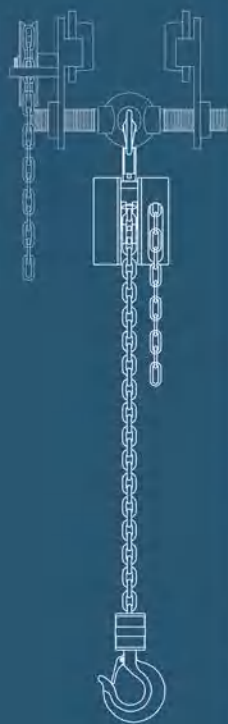

Wells Group, HK-based, has offered global chain&Ring inspection since 2005. In 4 years, it mapped mainland factories/products, and gained industrial resources, product knowledge & factory experience.

Amid china mainland's economic growth, the Group noted northern factories' big, cost-effective products ; Shandong people's honesty aligns with its "service with integrity" philosophy.

To boost services, optimize supply and meet client needs, the Group controls 5 factories via holding, focusing on 5 core products (chains, riggings, electric hoist chain block ect lift machine web sling ratchet tie down).

The Group expands: 2024 sees rope factory acquisition progress; future will enrich products and offer comprehensive rigging solutions.

With a Shandong office, it assigns full-time foreign trade/product staff to holding factories, enabling efficient "production-sales-service" localization.

Truly realize the one-stop shopping service at factory prices



DK-21 手动单轨小车 HANDTROLLEY

WELLS

车轮整体铸造并搭载全密封轴承，用于工字钢梁；

根据需要可以定制H型钢梁车轮；

表面采用喷塑工艺，可达到72小时盐雾试验；

根据需要可定制电镀锌、热镀锌工艺；

还可以定制不锈钢材质和锻造车轮；

产品规格0.5吨-10吨。

工厂直销
FACTORY OUTLET

The wheels are cast as a whole and equipped with fully sealed bearings, suitable for I-beam steel frames;

Custom H-shaped steel beam wheels can be made according to requirements;





The surface is treated with powder coating, which can withstand a 72-hour salt spray test;

Electric galvanizing and hot galvanizing processes can be customized as needed;

Custom stainless steel and forged wheels are also available;

The product specifications range from 0.5 tons to 10 tons.

We can customize the color RAL:



DK-210

DK-211

额定载荷 Rated Load (t)		1/2		1		2		3		5		10	
代码Code		210	211	210	211	210	211	210	211	210	211	210	211
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75	6.25	12.5						
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3	1.4	1.5						
满载手拉拉力 Full load hand chain pull (N)		42.4	80	112	175	228							
手链条高度 Standard chain height (m)		3	3	3	3	3							
尺寸Dimension	A(mm)	175	185	205	220	230	245	275	280	300	335	330	395
	B(mm)	175	205	230	275	300	380						
	C(mm)	185	235	250	310	345	455						
	H(mm)	95	135	155	185	205	285						
	Φ(mm)	29	46	52	70	72	90						
	D(mm)	68-120	68-120	88-145	100-150	100-175	125-203						
毛重 G.W (kg)		4.1	6.35	9.2	9.85	12.4	15.05	18	27.55	30.35	55	63	
箱规 Package size (cm)	210	21*16*15.8		23*21*19		24.5*24.5*20.5		27.5*25*22.5		32*31*28		40*40*36	
	211			28*21.5*19		30*23.5*19		30.5*28.5*20.5		37*31*28		46*40*36	

DK-31 手动单轨小车 HANDTROLLEY

WELLS

双梁设计，铸造车轮搭载全密封轴承，用于工字钢梁；

根据需要可以定制H型钢梁车轮；

表面采用喷塑工艺，可达到72小时盐雾试验；

根据需要可定制电镀锌、热镀锌工艺；

还可以定制不锈钢材质和锻造车轮；

产品规格0.5吨-10吨。

工厂直销
FACTORY OUTLET

Double beam design, cast wheels equipped with fully sealed bearings, used for I-beam steel;

H-shaped steel beam wheels can be customized as needed;



The surface is treated with powder coating process, which can withstand 72-hour salt spray test;

Customized electro-galvanizing and hot-galvanizing processes can be provided as needed;



Also available are stainless steel and forged wheels.

The product specifications range from 0.5 tons to 10 tons.


We can customize the color RAL:



DK-310



DK-311



额定载荷 Rated Load (t)		1/2	1	2	3	5	10
代码Code		310	310 311	310 311	310 311	310 311	310 311
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75	6.25	12.5
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3	1.4	1.5
满载手链拉力 Full load hand chain pull (N)		42.4	42.4	80	112	175	228
手链条高度 Standard chain height (m)		3	3	3	3	3	3
尺寸Dimension	A(mm)	170	180 220	210 255	240 275	285 315	330 360
	B(mm)	200	200	230	260	300	360
	C(mm)	170	230	230	255	325	470
	H(mm)	90	110	115	125	190	320
	K(mm)	28	35	36	40	53	94
	L(mm)	28	48	48	60	80	94
	D(mm)	68-94	68-100	94-124	100-145	100-165	110-203
毛重 G.W (kg)		(kg)	4.1 6.3 8.8	10 12.5 13.5 16	28 32	60 67	
箱规 Package size (cm)	310	21*16*15.8	23*21*19	24.5*24.5*20.5	27.5*25*22.5	32*31*28	40*36*30
	311		28*21.5*19	30*23.5*19	30.5*28.5*20.5	37*31*28	40*36*30

DK-41 手动单轨小车 HANDTROLLEY

WELLS

弯耳形墙板防撞保护，铸造车轮搭载全密封轴承，用于工字钢梁；

根据需要可以定制H型钢梁车轮；

表面采用喷塑工艺，可达到72小时盐雾试验；

根据需要可定制电镀锌、热镀锌工艺；

还可以定制不锈钢材质和锻造车轮；

产品规格0.5吨-10吨。

工厂直销
FACTORY OUTLET

Curved ear-shaped wall panels provide impact protection, with cast wheels equipped with fully sealed bearings and used for I-beam steel frames;

Custom H-beam steel wheel frames can be provided as per requirements;




The surface is treated with powder coating, which can withstand a 72-hour salt spray test;

Custom electro-galvanizing and hot-galvanizing processes can be provided as needed;



Custom stainless steel and forged wheel options are also available;

Product specifications range from 0.5 tons to 10 tons.


We can customize the color RAL:

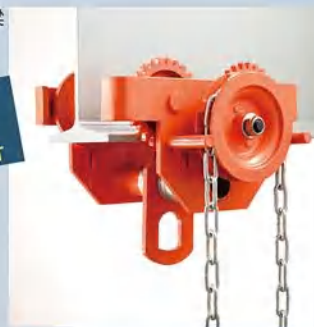

DK-410



DK-411



额定载荷 Rated Load (t)		1/2	1	2	3	5	10
代码Code		410	410 411	410 411	410 411	410 411	410 411
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75	6.25	12.5
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3	1.4	1.5
满载手链拉力 Full load hand chain pull (N)		42.4	42.4	80	112	175	228
手链条高度 Standard chain height (m)		3	3	3	3	3	3
尺寸Dimension	A(mm)	175	185 245	220 280	230 290	275 335	350 420
	B(mm)	200	235	260	325	365	440
	C(mm)	190	220	220	300	340	400
	H(mm)	110	130	125	175	200	240
	K(mm)	25	30	35	40	47	78
	L(mm)	36	41	45	75	77	117
	D(mm)	68-120	68-120	88-145	100-150	100-175	125-203
毛重 G.W (kg)		(kg)	4.2 6.9 9.8	10.8 13.5	17.65 20.60	30.2 33.0	88 90
箱规 Package size (cm)	410	22*20.5*16	26*22*18	28*24*22	34*25.5*22	38*31*26	48*41*32
	411		26*24*16	30*28*20	40*27*26	37*34*25	48*41*32

DK-51 手动单轨小车 HANDTROLLEY


WELLS

铸造车轮搭载全密封轴承，用于工字钢梁；
根据需要可以定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
根据需要可定制电镀锌、热镀锌工艺；
还可以定制不锈钢材质和锻造车轮；
产品规格0.5吨-10吨。

工厂直销
FACTORY OUTLET

The cast wheels are equipped with fully sealed bearings and are used for I-beam steel frames;
Customized H-beam steel wheel options are available upon request;
The surface is treated with powder coating, which can withstand a 72-hour salt spray test;
Customized electro-galvanizing and hot-galvanizing processes are also available upon request;
Customized stainless steel and forged wheels are also available.
Product specifications: 0.5 tons -10 tons.

We can customize the color RAL:

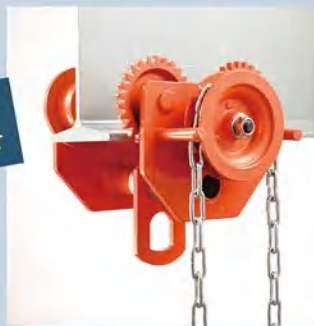

DK-61 手动单轨小车 HANDTROLLEY



WELLS

锻造丝杆梁设计，铸造车轮搭载全密封轴承，用于工字钢梁；
根据需要可以定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
根据需要可定制电镀锌、热镀锌工艺；
还可以定制不锈钢材质和锻造车轮；
产品规格1吨-5吨。


工厂直销
FACTORY OUTLET

Forged screw beam design, cast wheels equipped with fully sealed bearings, used for I-beam steel;
Custom H-beam wheel can be provided as per requirements;
Surface treated by powder coating process, can withstand 72-hour salt spray test;
Custom electro-galvanizing or hot-galvanizing processes can be provided as needed;
Also available in stainless steel material and forged wheels;
Product specifications: 1 tons -5 tons.

We can customize the color RAL:

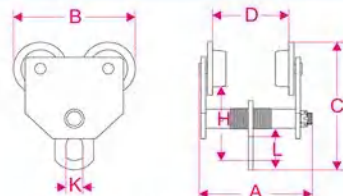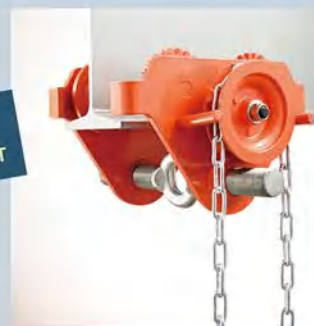


DK-510

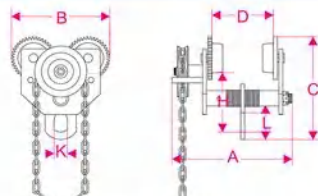


DK-511

额定载荷 Rated Load (t)	1/2		1		2		3		5		10		
代码Code	510	510	511	510	511	510	511	510	511	510	511		
试验载荷 Test Load (ton)	0.625	1.25		2.5		3.75		6.25		12.5			
最小转弯半径 Min Orankledia (m)	0.9	1		1.1		1.3		1.4		1.5			
满载手链条拉力Full load hand chain pull (N)	42.4	42.4		80		112		175		228			
手链条高度 Standard chain height (m)	3	3		3		3		3		3			
尺寸Dimension	A(mm)	175	185	245	220	280	230	290	275	335	330	395	
	B(mm)	175	205		230		275		300		380		
	C(mm)	190	220		220		300		340		455		
	H(mm)	110	130		125		175		200		285		
	K(mm)	25	30		35		40		47		78		
	L(mm)	36	41		45		75		77		117		
	D(mm)	68-120	68-120		88-145		100-150		100-175		125-203		
毛重 G.W (kg)	(kg)	4.1	6.39	9.20	9.85	12.4	15.05	18.00	27.55	30.35	55	63	
箱规 Package size (cm)	510	21*16*15.8		23*21*19		24.5*24.5*20.5		27.5*25*22.5		32*31*28		40*40*36	
	511			28*21.5*19		30*23.5*19		30.5*28.5*20.5		37*31*28		46*40*36	

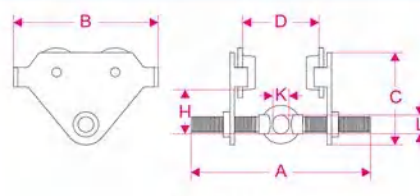

DK-610

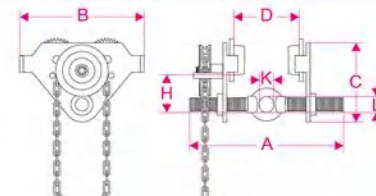

DK-611

额定载荷 Rated Load (t)		1		2		3		5		
代码Code		610	611	610	611	610	611	610	611	
试验载荷 Test Load (ton)		1.25		2.5		3.75		6.25		
最小转弯半径 Min Orankledia (m)		1		1.1		1.3		1.4		
满载手链条拉力Full load hand chain pull (N)		42.4		80		112		175		
手链条高度 Standard chain height (m)		3		3		3		3		
尺寸Dimension	A(mm)	303	363	313	373	328	388	345	405	
	B(mm)	256		294		347		397		
	C(mm)	183		210		250		285		
	H(mm)	80		105		115		130		
	K(mm)	34		40		44		55		
	L(mm)	30		40		45		52		
	D(mm)	65-220		65-220		80-220		80-220		
毛重 G.W (kg)		(kg)	7.750	10.65	12.65	15.55	20.45	23.45	31.8	34.8
箱规 Package size (cm)	610	26*22*18		28*24*22		34*25.5*22		38*31*26		
	611	26*24*16		30*28*20		40*27*26		37*34*25		


DK-71 手动单轨小车 HANDTROLLEY

WELLS

锻造可拆卸轴支撑，铸造车轮并搭载全密封轴承，用于工字钢梁
根据需要可以定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
根据需要可定制电镀锌、热镀锌工艺；
还可以定制不锈钢材质和锻造车轮；
产品规格1吨-5吨。

工厂直销
FACTORY OUTLET

Forged detachable shaft support, cast wheels and equipped with fully sealed bearings, for I-beam steel frames.
H-shaped steel beam wheels can be customized as needed;
The surface is treated with powder coating, which can withstand a 72-hour salt spray test;
Customized electro-galvanizing and hot-galvanizing processes can be provided as required;
Also available are custom stainless steel materials and forged wheels;
Product specifications: 1 tons -5 tons.
We can customize the color RAL:

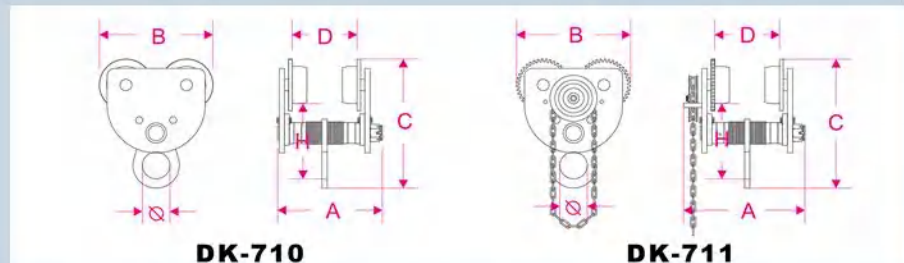

额定载荷 Rated Load (t)		1		2		3		5	
代码Code		710	711	710	711	710	711	710	711
试验载荷 Test Load (ton)		1.25		2.5		3.75		6.25	
最小转弯半径 Min Orankledia (m)		1		1.1		1.3		1.4	
满载手链拉力 Full load hand chain pull (N)		42.4		80		112		175	
手链条高度 Standard chain height (m)		3		3		3		3	
尺寸Dimension	A(mm)	185	245	220	280	230	290	275	335
	B(mm)	205		230		275		300	
	C(mm)	235		250		310		345	
	H(mm)	135		155		185		205	
	Φ(mm)	46		52		70		72	
	D(mm)	68-120		88-145		100-150		100-175	
毛重 G.W (kg)		(kg)	7.2 10.1	10.3 13.2	15.7 18.7	27.5	30.5		
箱规 Package size (cm)	710	23*21*19		24.5*24.5*20.5		27.5*25*22.5		32*31*28	
	711	28*21.5*19		30*23.5*19		30.5*28.5*20.5		37*21*28	

DK-81 手动单轨小车 HANDTROLLEY




WELLS

弯耳形防撞墙板，锻造可拆卸轴支撑，铸造车轮并搭载全密封轴承，用于工字钢梁；
根据需要可以定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
根据需要可定制电镀锌、热镀锌工艺；
还可以定制不锈钢材质和锻造车轮；
产品规格1吨-5吨。

工厂直销
FACTORY OUTLET

Curved ear-shaped anti-collision wall panels, forged detachable shaft support, cast wheels and equipped with fully sealed bearings for I-beam steel;
H-beam steel wheels can be customized as needed;
The surface is treated with powder coating process, which can withstand 72-hour salt spray test;
Customized electro-galvanizing and hot-galvanizing processes can be provided as needed;
Also available in stainless steel material and forged wheels;
Product specifications: 1 ton -5 tons.


We can customize the color RAL:

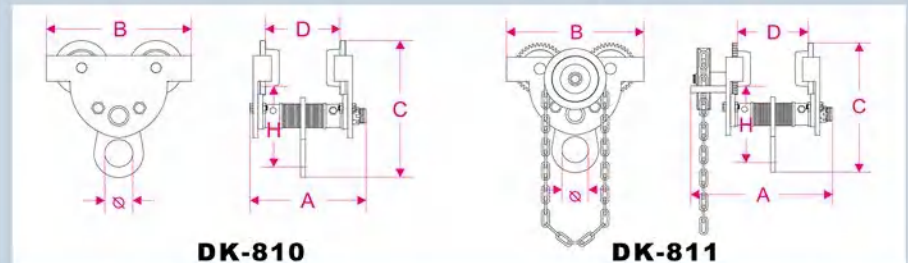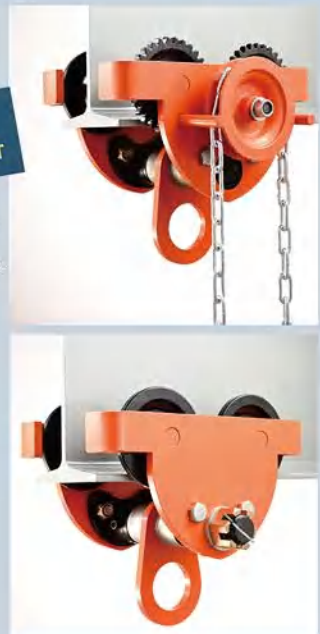

额定载荷 Rated Load (t)		1		2		3		5	
代码Code		810	811	810	811	810	811	810	811
试验载荷 Test Load (ton)		1.25		2.5		3.75		6.25	
最小转弯半径 Min Orankledia (m)		1		1.1		1.3		1.4	
满载手链拉力 Full load hand chain pull (N)		42.4		80		112		175	
手链条高度 Standard chain height (m)		3		3		3		3	
尺寸Dimension	A(mm)	303	363	313	373	328	388	275	335
	B(mm)	238		272		315		360	
	C(mm)	235		250		310		345	
	H(mm)	135		155		185		205	
	Φ(mm)	46		52		70		72	
	D(mm)	68-120		88-145		100-150		100-175	
毛重 G.W (kg)		(kg)	7.6 10.5	11.0 13.9	16.8 19.8	30.0	33.0		
箱规 Package size (cm)	810	26*22*18		28*24*22		34*25.5*22		38*31*26	
	811	26*24*16		30*28*20		40*27*26		37*34*25	



弯耳形防撞墙板，双梁设计，铸造车轮搭载全密封轴承，用于工字钢梁；根据需要可以定制H型钢梁车轮；表面采用喷塑工艺，可达到72小时盐雾试验；根据需要可定制电镀锌、热镀锌工艺；还可以定制不锈钢材质和锻造车轮；产品规格0.5吨-30吨。

工厂直销
FACTORY OUTLET


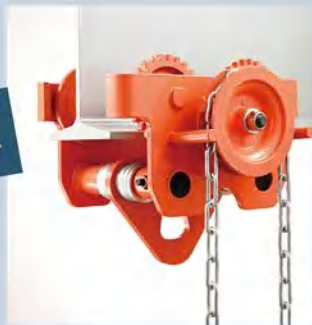


Curved ear-shaped anti-collision wall panels, with double beam design, equipped with cast wheels with fully sealed bearings, for use with I-beam steel;
H-beam steel wheels can also be customized as needed;
The surface is treated with powder coating process, which can withstand 72-hour salt spray test;
Customized electro-galvanizing and hot-galvanizing processes can be provided as needed;
Also available are stainless steel materials and forged wheels;
Product specifications range from 0.5 tons to 30 tons.


We can customize the color RAL:



DK-910



DK-911



额定载荷 Rated Load (t)		1/2		1		2		3		5		10		20		30		
代码Code		910		910 911		910 911		910 911		910 911		910 911		910 911		910 911		
试验载荷 Test Load (ton)		0.625		1.25		2.5		3.75		6.25		12.5		25		37.5		
最小转弯半径 Min Orankledia (m)		0.9		1		1.1		1.3		1.4		1.5		1.6		1.7		
满载手链拉力Full load hand chain pull (N)		42.4		42.4		80		112		175		228		228		228		
手链节高度 Standard chain height (mm)		3		3		3		3		3		3		3		3		
尺寸Dimension	A(mm)	170	190	196	210	216	230	236	275	281	350	420	350	420	450	450		
	B(mm)	200	235	260	325	365	440	640	800									
	C(mm)	190	221	221	300	342	400	450	420									
	H(mm)	110	129	125	173	200	240	240	240									
	K(mm)	25	39	47	58	69	77	77	94									
	L(mm)	35	58	70	84	100	117	117	94									
	D(mm)	68-115	68-125	88-145	100-150	100-175	125-203	125-203	150-225									
毛重 G.W (kg)		(kg)		6.5	10	13.5	16	18.7	24.5	27.8	38.6	41.6	88	90	145	150	175	185
箱规 Package size (cm)	910	22*20.5*16		26*22*18		28*24*22		34*25.5*22		38*31*26		48*41*32		73*44*33		90*50*46		
	911			26*24*16		30*28*20		40*27*26		37*34*25		48*41*32		73*44*33		90*50*46		


锻造单梁设计，双轴加强杆；铸造车轮搭载全密封轴承，用于工字钢梁；根据需要可以定制H型钢梁车轮；表面采用喷塑工艺；还可以定制不锈钢材质和锻造车轮；产品规格1吨-10吨。

工厂直销
FACTORY OUTLET




Forged single beam design, double-axis reinforcing rods;
Cast wheels equipped with fully sealed bearings, used for I-beam steel;
Customizable H-shaped steel beam wheels as needed;
Surface treated by powder coating process;
Also customizable with stainless steel material and forged wheels;
Product specifications: 1 ton - 10 tons.

We can customize the color RAL:



DK-1010



额定载荷 Rated Load (t)		1		2		3		5		10	
代码Code		1010		1010		1010		1010		1010	
试验载荷 Test Load (ton)		1.25	2.5	3.75	6.25	12.5					
最小转弯半径 Min Orankledia (m)		1	1.1	1.3	1.4	1.5					
满载手拉拉力 Full load hand chain pull (N)		42.4	80	112	175	228					
手链条高度 Standard chain height (m)		3	3	3	3	3					
尺寸Dimension	A(mm)	275	300	300	335	380					
	B(mm)	250	290	290	370	400					
	C(mm)	215	245	260	300	360					
	H(mm)	105	110	115	115	130					
	K(mm)	20	22	22	28	34					
	L(mm)	31	35	35	50	65					
	D(mm)	60-140	70-140	70-140	100-170	100-190					
毛重 G.W (kg)		(kg)	11.1	15.85	17.4	32.8					
箱规 Package size (cm)		(cm)	26*24*16	30*28*20	40*27*26	37*34*25					

弯耳形墙板防撞保护, 铸造车轮搭载全密封轴承, 用于工字钢梁
根据需要可以定制H型钢梁车轮;

表面采用喷塑工艺, 可达到72小时盐雾试验;

根据需要可定制电镀锌、热镀锌工艺;

还可以定制不锈钢材质和锻造车轮;

产品规格0.5吨-5吨。

Curved ear-shaped wall panels provide impact protection. Cast wheels are equipped with fully sealed bearings and are used for I-beam steel frames.

Custom H-beam steel wheel frames can be made according to requirements. The surface is treated with powder coating, which can withstand a 72-hour salt spray test.

Custom electro-galvanizing and hot-galvanizing processes can be provided as needed.



Custom stainless steel and forged wheel options are also available.

Product specifications range from 0.5 tons to 10 tons.

工厂直销
FACTORY OUTLET



We can customize the color RAL:

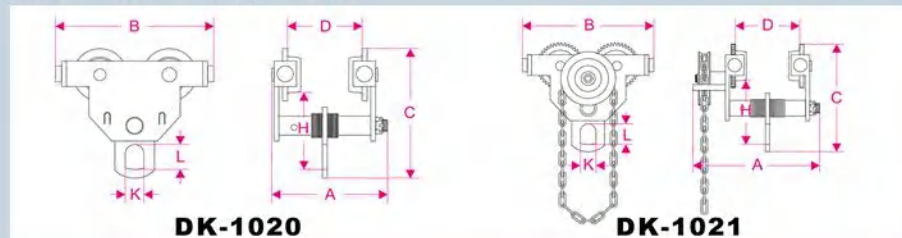

额定载荷 Rated Load (t)		1/2		1		2		3		5	
代码Code		1020		1020 1021		1020 1021		1020 1021		1020 1021	
试验载荷 Test Load (ton)		0.625		1.25		2.5		3.75		6.25	
最小转弯半径 Min Orankledia (m)		0.9		1		1.1		1.3		1.4	
满载手链条拉力Full load hand chain pull (N)		42.4		42.4		80		112		175	
手链条高度 Standard chain height (m)		3		3		3		3		3	
尺寸Dimension	A(mm)	175		185 245		220 280		230 290		275 335	
	B(mm)	220		255		308		373		413	
	C(mm)	190		220		220		300		340	
	H(mm)	110		130		125		175		200	
	K(mm)	25		30		35		40		47	
	L(mm)	36		41		45		75		77	
	D(mm)	68-120		68-120		88-145		100-150		100-175	
毛重 G.W (kg)		(kg)	4.2	6.9	9.8	10.8	13.5	17.65	20.60	30.2	33.0
箱规 Package size (cm)	1020	22*20.5*16		26*22*18		28*24*22		34*25.5*22		38*31*26	
	1021			26*24*16		30*28*20		40*27*26		37*34*25	

弯耳形防撞墙板, 锻造可拆卸轴支撑, 铸造车轮并搭载全密封轴承, 用于工字钢梁; 根据需要可以定制H型钢梁车轮;

表面采用喷塑工艺, 可达到72小时盐雾试验;

根据需要可定制电镀锌、热镀锌工艺;

还可以定制不锈钢材质和锻造车轮;

产品规格0.5吨-5吨。

Curved ear-shaped anti-collision wall panels, forged detachable shaft support, cast wheels and equipped with fully sealed bearings for I-beam steel;

H-beam steel beams can be customized as needed;

The wheels are surface treated with powder coating, which can withstand a 72-hour salt spray test;

Customized electro-galvanizing or hot-galvanizing processes can be provided as needed;


Also available in stainless steel material and forged wheels;

Product specifications: 0.5 ton -5 tons.

工厂直销
FACTORY OUTLET



We can customize the color RAL:

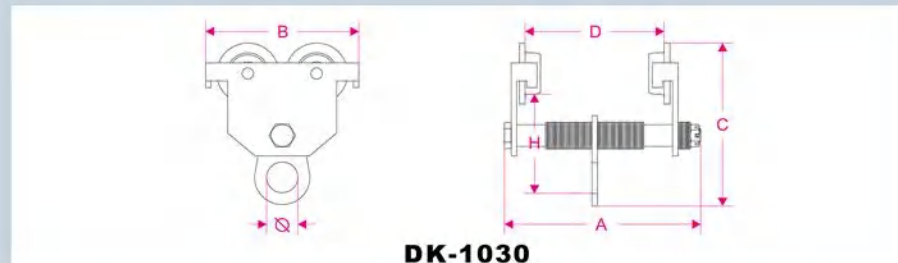

额定载荷 Rated Load (t)		1/2	1	2	3	5	
代码Code		1030					
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75	6.25	
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3	1.4	
满载手链条拉力Full load hand chain pull (N)		42.4	42.4	80	112	175	
手链条高度 Standard chain height (m)		0	0	0	0	0	
尺寸Dimension	A(mm)	275	290	295	295	320	
	B(mm)	205	225	260	310	385	
	C(mm)	195	245	260	315	345	
	H(mm)	110	145	150	175	200	
	Φ(mm)	28	41	49	70	73	
	D(mm)	64-203	64-203	64-203	64-203	115-206	
毛重 G.W		(kg)	5	8.1	11.4	16.8	30.6
箱规 Package size (cm)		(cm)	28.5*21.5*16	30*23.5*18	30.5*27*19.5	30.5*32*22.5	33*39.5*26

DK-1040 手动单轨小车 HANDTROLLEY

WELLS

弯耳形防撞墙板，锻造可拆卸轴支撑，铸造车轮并搭载全密封轴承，用于工字钢梁；根据需要可以定制H型钢梁车轮；

表面采用喷塑工艺，可达到72小时盐雾试验；

根据需要可定制电镀锌、热镀锌工艺；

还可以定制不锈钢材质和锻造车轮；



产品规格0.5吨-3吨。

Curved ear-shaped anti-collision wall panels, forged detachable shaft support, cast wheels and equipped with fully sealed bearings for I-beam steel; H-beam steel beams can be customized as needed; The wheels are surface treated with powder coating, which can withstand a 72-hour salt spray test; Customized electro-galvanizing and hot-galvanizing processes can be provided as needed; Also available in stainless steel material and forged wheels; Product specifications: 0.5 ton -3 tons.

We can customize the color RAL:



工厂直销
FACTORY OUTLET

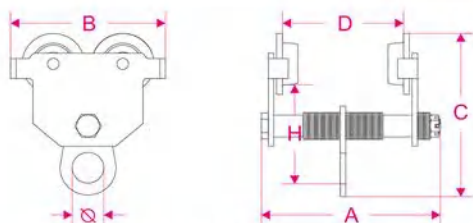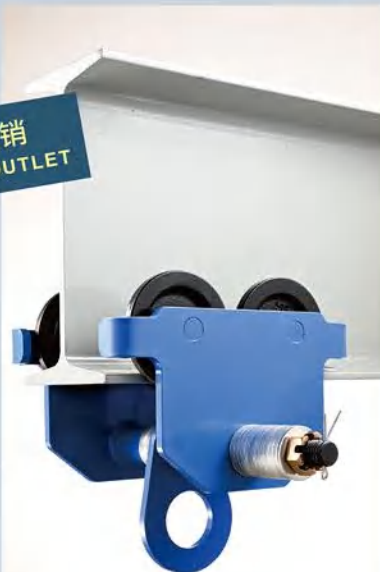

DK-1040

额定载荷 Rated Load (t)		1/2	1	2	3
代码Code		1040			
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3
满载手拉力 Full load hand chain pull (N)		42.4	42.4	80	112
手链条高度 Standard chain height (m)		0	0	0	0
尺寸Dimension	A(mm)	210	265	260	270
	B(mm)	210	235	230	270
	C(mm)	195	245	250	280
	H(mm)	110	145	155	175
	Ø(mm)	28	41	49	70
	D(mm)	64-140	64-178	64-178	64-178
	毛重 G.W (kg)	4.7	7.65	9.1	12.3
箱规 Package size (cm)		(cm)	21*21*16	22*22*18	27*24*18
					28*28*19

DK-1050 手动单轨小车 HANDTROLLEY

WELLS

弯耳形墙板防撞保护，圆钢车轮搭载全密封轴承，用于工字钢梁；根据需要可以定制H型钢梁车轮；

表面采用抛光工艺，可达到72小时盐雾试验；

本产品为304不锈钢材质；

产品规格0.5吨-10吨。

Curved ear-shaped wall panels provide impact protection, with round steel wheels equipped with fully sealed bearings, suitable for I-beam steel frames;

Customized H-shaped steel beam wheels can be provided as per requirements;

The surface is treated with polishing process, capable of withstanding 72-hour salt spray tests;


This product is made of 304 stainless steel.

Product specifications: 0.5 tons - 10 tons

工厂直销
FACTORY OUTLET



304

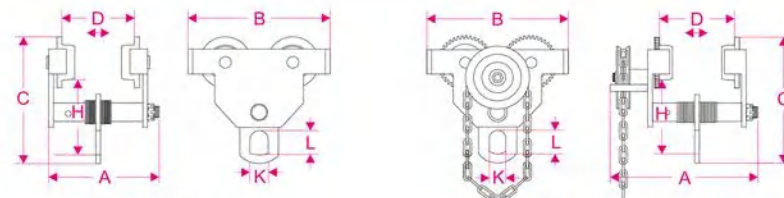

DK-1050

DK-1051

额定载荷 Rated Load (t)		1/2	1	2	3	5	10
代码Code		1050	1050 1051	1050 1051	1050 1051	1050 1051	1050 1051
试验载荷 Test Load (ton)		0.625	1.25	2.5	3.75	6.25	12.5
最小转弯半径 Min Orankledia (m)		0.9	1	1.1	1.3	1.4	1.5
满载手拉力 Full load hand chain pull (N)		42.4	42.4	80	112	175	228
手链条高度 Standard chain height (m)		3	3	3	3	3	3
尺寸Dimension	A(mm)	175	185 245	220 280	230 290	275 335	350 420
	B(mm)	200	235	260	325	365	440
	C(mm)	190	220	220	300	340	400
	H(mm)	110	130	125	175	200	240
	K(mm)	25	30	35	40	47	78
	L(mm)	36	41	45	75	77	117
	D(mm)	68-120	68-120	88-145	100-150	100-175	125-203
毛重 G.W (kg)		4.2	6.9 9.8	10.8 13.5	17.65 20.60	30.2 33.0	88 90
箱规 Package size (cm)	1050	22*20.5*16	26*22*18	28*24*22	34*25.5*22	38*31*26	48*41*32
	1051		26*24*16	30*28*20	40*27*26	37*34*25	48*41*32



220伏纯铜电机，铸造车轮搭载全密封轴承，用于工字钢梁；
根据需要可以定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
还可以定制不锈钢材质和锻造车轮；
产品规格0.5吨-1吨。

工厂直销
FACTORY OUTLET



220-volt pure copper motor, cast wheels with fully sealed bearings, used for I-beam steel beams;
Custom H-shaped steel beam wheels can be provided as per requirements;
The surface is treated with powder coating process, capable of withstanding 72-hour salt spray test;
Customized stainless steel and forged wheels are also available;
Product specifications range from 0.5 tons to 1 ton.

We can customize the color RAL:

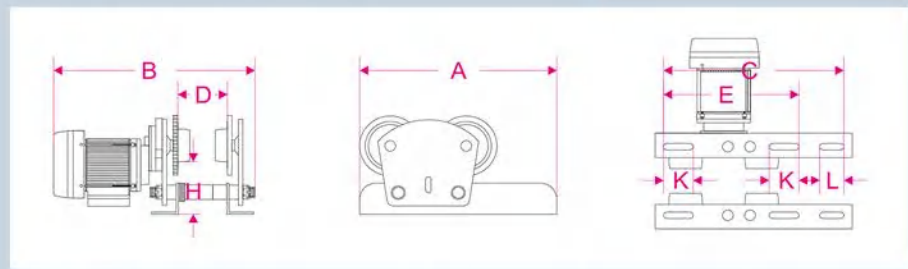

额定载荷 Rated Load (t)		1/2	1
试验载荷 Test Load (ton)		0.625	1.25
最小转弯半径 Min Orankledia (m)		1	1
电机功率 (w)		60	200
运行速度(m/min)		11	11
尺寸Dimension	A(mm)	280	357
	B(mm)	300	375
	C(mm)	260	328
	H(mm)	65	90
	K(mm)	52	53
	L(mm)	40	38
	D(mm)	68-110	68-110
毛重 G.W (kg)		8.35	14.5
箱规 Package size (cm)		32*20*16	37*27*20


超低净空组合式手拉葫芦有效的提升极限空间，搭配防撞铸造车轮，用在工字钢梁上；
也可定制H型钢梁车轮；
表面采用喷塑工艺，可达到72小时盐雾试验；
根据需要可定制电镀锌、热镀锌工艺；
还可以定制不锈钢材质和锻造车轮；
产品规格1吨-5吨。

工厂直销
FACTORY OUTLET



The ultra-low clearance combined hand chain hoist effectively expands the lifting space. It is equipped with anti-collision cast wheels and is used on I-beam steel frames. It can also be customized with H-shaped steel frame wheels.
The surface is treated with powder coating, which can withstand a 72-hour salt spray test. According to requirements, electro-galvanizing and hot-galvanizing processes can be customized. Customized stainless steel materials and forged wheels are also available.
Product specifications range from 1 tons to 5 tons.

We can customize the color RAL:

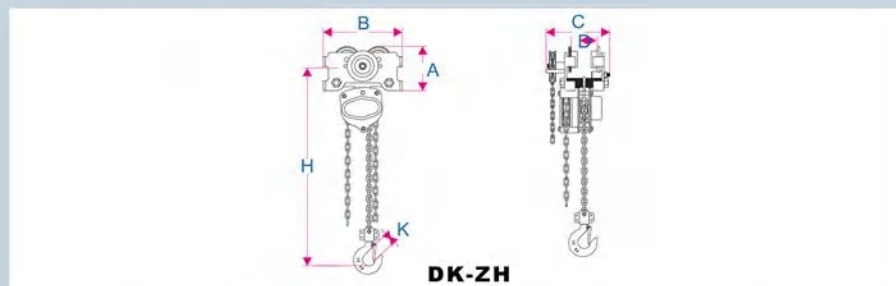


额定载荷 Rated Load (t)		1	2	3	5
代码Code		DK-ZH			
试验载荷 Test Load (ton)		1.25	2.5	3.75	6.25
最小转弯半径 Min Orankledia (m)		0.8	1.2	1.4	1.6
满载手拉拉力 Full load hand chain pull (N)		300	340	370	385
手链条高度 Standard chain height (m)		3	3	3	3
尺寸Dimension	A(mm)	155	185	210	245
	B(mm)	285	310	385	425
	C(mm)	330	330	335	370
	H(mm)	280	370	420	580
	K(mm)	25	40	40	50
	D(mm)	68-203	68-203	68-203	68-203
毛重 G.W (kg)		22.05	35	47	68.5
箱规 Package size (cm)		35*30*33	35*33*40	41*40*36	45*40*36

弯耳形防撞墙板，双梁设计，铸造车轮搭载全密封轴承，用于工字钢梁；根据需要可以定制H型钢梁车轮；表面采用喷塑工艺，可达到72小时盐雾试验；根据需要可定制电镀锌、热镀锌工艺；还可以定制不锈钢材质和锻造车轮；产品规格0.5吨-30吨。



工厂直销
FACTORY OUTLET

Curved ear-shaped anti-collision wall panels, with double beam design, equipped with cast wheels with fully sealed bearings, for use on I-beam steel;
H-beam steel wheels can be customized as needed;
The surface is treated with powder coating process, which can withstand 72-hour salt spray test;
Customized electro-galvanizing and hot-galvanizing processes can be provided as needed;
Also available are stainless steel materials and forged wheels;
Product specifications range from 0.5 tons to 30 tons.


We can customize the color RAL:



DK-D910



DK-D911



额定载荷 Rated Load (t)	10		20		30	
代码Code	D910	D911	D910	D911	D910	D911
试验载荷 Test Load (ton)	12.5	12.5	25	25	37.5	37.5
最小转弯半径 Min Orankledia (m)	1.5	1.5	1.6	1.6	1.7	1.7
满载手链拉力 Full load hand chain pull (N)	228	228	228	228	228	228
手链索高度 Standard chain height (m)	3	3	3	3	3	3
尺寸Dimension	A(mm)	350 420	350 420	350 420	450 450	450 450
	B(mm)	440	640	640	800	800
	C(mm)	400	450	450	420	420
	H(mm)	240	240	240	240	240
	K(mm)	77	77	77	94	94
	L(mm)	117	117	117	94	94
	D(mm)	125-203	125-203	125-203	150-225	150-225
毛重 G.W (kg)	(kg)	88 90	145 150	145 150	175 185	175 185
箱规 Package size (cm)	D910	48*41*32	73*44*33	73*44*33	90*50*46	90*50*46
	D911	48*41*32	73*44*33	73*44*33	90*50*46	90*50*46



1



2



3



4



5



6



7



8



9



10




11



12



13



14



15



16

正确的安装方式
Properly hang the trolley



NO



NO



Yes

安装注意事项：调整车轮缘与轨道凸缘之间的间隙，确保两侧的间隙在2到3毫米之间。

Installation precautions: Adjust the clearance between the wheel rim and the track flange to ensure that each side is inBetween 2 and 3 millimeters.