

LINYI WELLS IMP&EXP CO.,LTD

World Class Lifting Solutions



20
YEARS

www.wellsxgt.com
<https://wellsliftfactory.com/>



LINYI WELLSIMP&EXP CO.LTD
Add: Room 1104,B-Building,Yigao Shanghai Jie,Linyi City,China
Tel: 0086-539-8010607 Fax: 0086-539-8010607
Mobile: 13792415765 (viber,WhatsApp,We chat no)
<http://wellsd.en.alibaba.com> www.wellsxgt.com
<https://wellsliftfactory.com/>
Email: gl@wellsxgt.com skype: kkglsky


About us

WELLS' subsidiary, Ruiyuan factory, is a hardware factory that specializes in blind rivets. It was established in 1993 and has been focusing on the design and production of hardware fasteners. After years of unremitting efforts, Ruiyuan has gradually grown into a mature hardware manufacturer.



Currently, the factory covers an area of 3,000 square meters, with 3 production workshops and 1 large warehouse. The monthly output reaches 6,000,000 pieces.

The factory mainly manufactures and sells various types of precision hardware fasteners, such as blind rivets, hollow rivets, solid rivets, screws, and non - standard rivets. These products have a wide range of applications and can be used in various industries, including construction, healthcare, doors and windows, and electronic equipment.


Our company has professional design and development teams. They can provide customers with suitable solutions and free samples. If you are seeking a reliable OEM/ODM partner, Ruiyuan is your best choice. Welcome to contact us for long - term cooperation and mutual success.

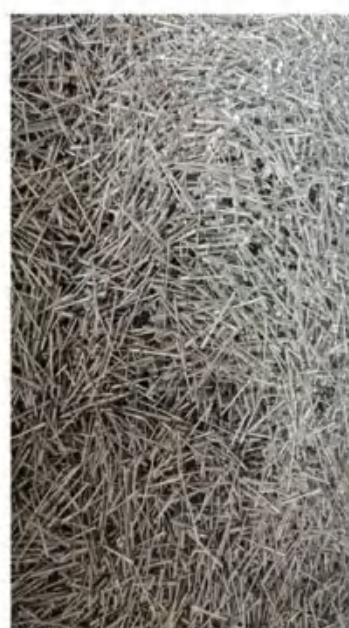

Blind rivets

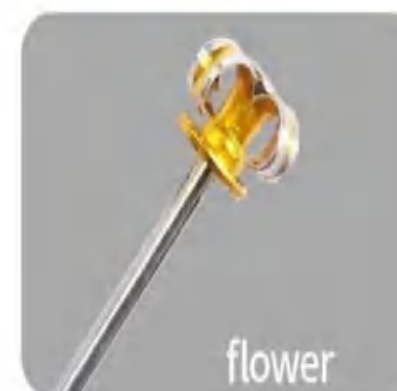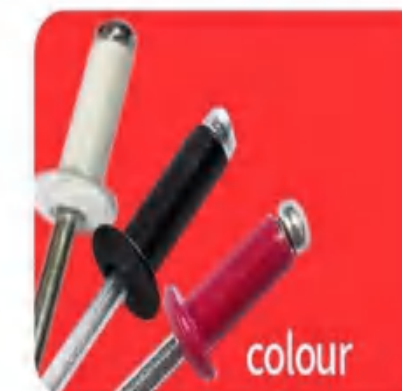

OPEN TYPE BLIND RIVET

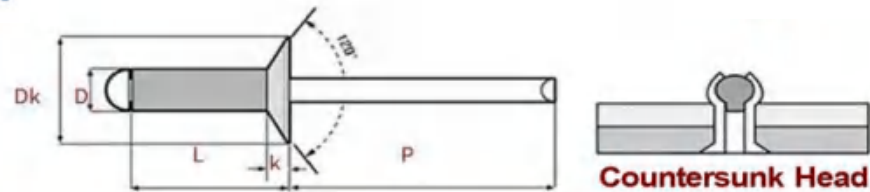


铆钉参数表

The Data Form Of The Rivet

D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 2.4mm	4-14mm	0.5-10mm	Φ 2.5mm	Φ 4.8±0.25mm	1	27-29mm
中2.9mm	4-19mm	0.5-14mm	Φ 3.0mm	Φ 6.0±0.25mm	1.4	27-29mm
Φ 3.2mm	4-19mm	0.5-14mm	Φ 3.3mm	Φ 6.0±0.25mm	1.4	27-29mm
Φ 4.0mm	5-30mm	0.5-26mm	Φ 4.0mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	8-35mm	0.5-30mm	Φ 4.8mm	Φ 9.6±0.25mm	2.0	27-29mm
中5.0mm	8-35mm	0.5-30mm	Φ 5.0mm	Φ 10±0.25mm	2.0	27-29mm
Φ 6.0mm	10-40mm	1.0-33mm	Φ 6.0mm	Φ 12±0.25mm	2.4	27-29mm
Φ 6.4mm	10-40mm	1.0-33mm	Φ 6.4mm	Φ 12.8±0.25mm	2.7	27-29mm

Product size: D×L
产品尺寸: 直径×长度

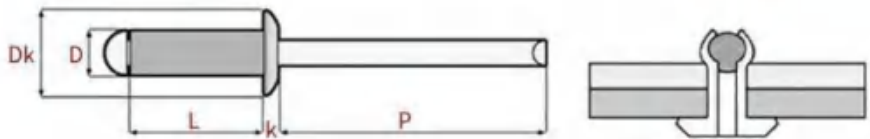


铆钉参数表

The Data Form Of The Rivet

D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 2.4mm	4-14mm	0.5-10mm	Φ 2.5mm	Φ 4.8±0.25mm	1	27-29mm
中2.9mm	4-19mm	0.5-14mm	Φ 3.0mm	Φ 6.0±0.25mm	1.4	27-29mm
Φ 3.2mm	4-19mm	0.5-14mm	Φ 3.3mm	Φ 6.0±0.25mm	1.4	27-29mm
Φ 4.0mm	5-30mm	0.5-26mm	Φ 4.0mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	8-35mm	0.5-30mm	Φ 4.8mm	Φ 9.6±0.25mm	2.0	27-29mm
中5.0mm	8-35mm	0.5-30mm	Φ 5.0mm	Φ 10±0.25mm	2.0	27-29mm
Φ 6.0mm	10-40mm	1.0-33mm	Φ 6.0mm	Φ 12±0.25mm	2.4	27-29mm
Φ 6.4mm	10-40mm	1.0-33mm	Φ 6.4mm	Φ 12.8±0.25mm	2.7	27-29mm

Product size: D×L
产品尺寸: 直径×长度

OPEN END LARGE BRIM ALUMINIUM STEEL BLIND RIVETS

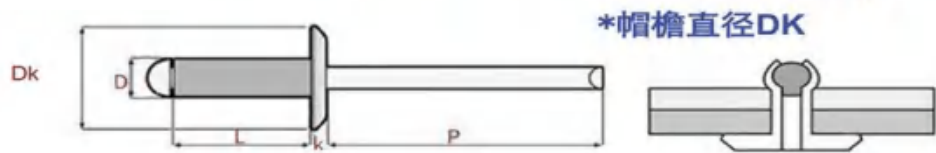

铆钉参数表

The Data Form Of The Rivet


D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 3.2mm	6-20mm	1.5-16mm	Φ 3.3mm	Φ 9.5±0.25mm	1.3	27-29mm
Φ 4.0mm	8-30mm	2.0-26mm	Φ 4.1mm	Φ 12±0.25mm	1.7	27-29mm
Φ 4.8mm	8-30mm	3.0-25mm	Φ 5.0mm	Φ 16±0.25mm	2.0	27-29mm

Product size: D×L
产品尺寸: 直径×长度




More convenient to use with a rivet gun

CLOSE END BLIND RIVETS

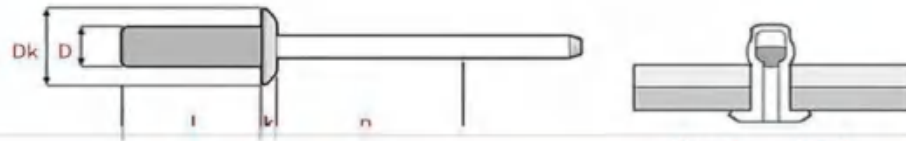


铆钉参数表 The Data Form Of The Rivet						
D	L	Grip Range	Hole Size	DK	k	p
直径	长度	铆接范围	钻孔直径	帽檐直径	帽檐厚度	尾杆
Φ 3.2mm	6-14mm	2-10mm	Φ 3.3mm	Φ 6.0±0.25mm	1.3	27-29mm
Φ 4.0mm	6-20mm	2-16mm	Φ 4.1mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	8-30mm	3-25mm	Φ 5.0mm	Φ 9.6±0.25mm	2.0	27-29mm
Φ 6.4mm	10-20mm	4-12mm	Φ 6.5mm	Φ 12.7±0.25mm	2.7	27-29mm
Product size:D×L 产品尺寸: 直径×长度						

CLOSE END BLIND RIVETS

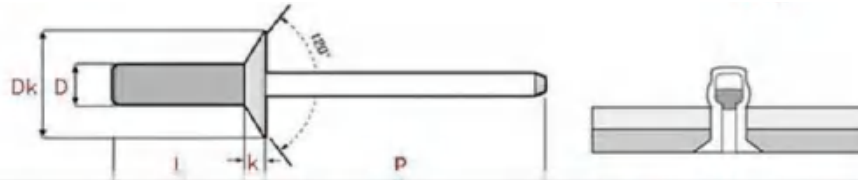


铆钉参数表 The Data Form Of The Rivet						
D	L	Grip Range	Hole Size	DK	k	p
直径	长度	铆接范围	钻孔直径	帽檐直径	帽檐厚度	尾杆
Φ 3.2mm	6-14mm	2-10mm	Φ 3.3mm	Φ 6.0±0.25mm	1.3	27-29mm
Φ 4.0mm	6-20mm	2-16mm	Φ 4.1mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	8-30mm	3-25mm	Φ 5.0mm	Φ 9.6±0.25mm	2.0	27-29mm
Φ 6.4mm	10-20mm	4-12mm	Φ 6.5mm	Φ 12.7±0.25mm	2.7	27-29mm
Product size:D×L 产品尺寸: 直径×长度						

DOUBLE DRUM TYPE BLIND RIVETS

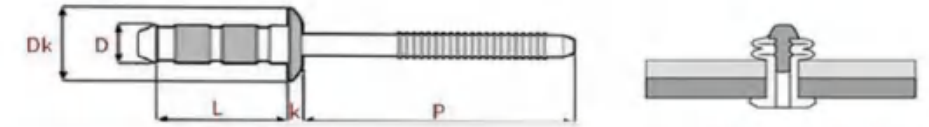

铆钉参数表 The Data Form Of The Rivet						
D	L	Grip Range	Hole Size	DK	k	p
直径	长度	铆接范围	钻孔直径	帽檐直径	帽檐厚度	尾杆
Φ 3.2mm	8-14mm	0.5-9mm	Φ 3.3mm	Φ 6.0±0.25mm	1.3	27-29mm
Φ 4.0mm	8-20mm	1-14mm	Φ 4.1mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	10-20mm	1-14mm	Φ 5.0mm	Φ 9.6±0.25mm	2.0	27-29mm
Φ 6.4mm	14-24mm	2-16mm	Φ 6.5mm	Φ 12.7±0.25mm	2.7	27-29mm
Product size:D×L 产品尺寸: 直径×长度						

LANTERN TYPE (TRIANGULAR CLAW) BLIND RIVETS

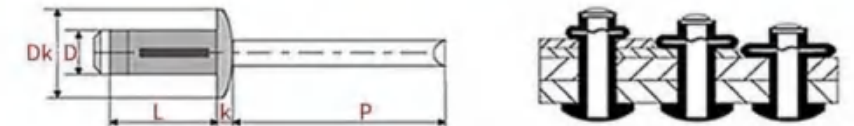

铆钉参数表 The Data Form Of The Rivet						
D	L	Grip Range	Hole Size	DK	k	p
直径	长度	铆接范围	钻孔直径	帽檐直径	帽檐厚度	尾杆
Φ 3.2mm	14/16/20mm	1-8mm	Φ 3.3mm	Φ 6.0±0.25mm	1.3	27-29mm
Φ 4.0mm	14/16/18/21/25mm	1-13mm	Φ 4.1mm	Φ 8.0±0.25mm	1.7	27-29mm
Φ 4.8mm	14/16/18/20/25mm	1-13mm	Φ 5.0mm	Φ 9.6±0.25mm	2.0	27-29mm
Φ 6.4mm	16/20/23/25mm	2-13mm	Φ 6.5mm	Φ 12.7±0.25mm	2.7	27-29mm
Product size:D×L 产品尺寸: 直径×长度						


LANTERN TYPE(TRIANGULAR CLAW)PLASTICS BLIND RIVETS

Special wheel arch buckle for automobiles
汽车专用轮眉卡扣




Round head						
铆钉参数表 The Data Form Of The Rivet						
D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 3. 8mm	18mm	2. 7-5. 5mm	Φ 4. 0mm	中156±0. 25mm	2. 0	27-29mm
Φ 3. 8mm	25mm	6-10mm	Φ 4. 0mm	Φ 15. 6±0. 25mm	2. 0	27-29mm
Φ 4. 8mm	14mm	3. 2-7. 5mm	Φ 5. 0mm	Φ 8. 9±0. 25mm	2. 3	27-29mm
Φ 4. 8mm	18mm	3. 2-5mm	Φ 5. 0mm	Φ 12. 3±0. 25mm	2. 3	27-29mm
Φ 5mm	16. 5mm	1. 4-6. 0mm	Φ 5. 2mm	Φ 11. 3±0. 25mm	2. 3	27-29mm
中5. 9mm	24mm	4. 4-8mm	Φ 6mm	Φ 13±0. 25mm	2. 5	27-29mm
Φ 6. 1mm	30mm	7. 9-11mm	Φ 6. 1mm	Φ 16. 8±0. 25mm	2. 7	27-29mm
Φ 6. 1mm	20mm	7. 5-10mm	Φ 6. 1mm	Φ 16. 8±0. 25mm	2. 7	27-29mm
Product size:D×L 产品尺寸：直径×长度						

FLOWERING TYPE BLIND RIVETS

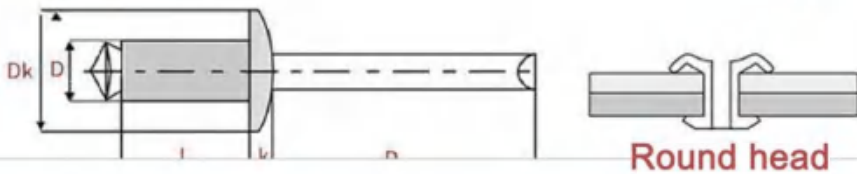

Round head						
铆钉参数表 The Data Form Of The Rivet						
D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 3. 2mm	8-16mm	1-10mm	Φ 3. 3mm	Φ 6. 0±0. 25mm	1. 4	27-29mm
Φ 4. 0mm	10-16mm	1-10mm	Φ 4. 1mm	中8. 0±0. 25mm	1. 7	27-29mm
Φ 4. 8mm	10-16mm	1-8mm	Φ 5. 0mm	Φ 9. 6±0. 25mm	2. 0	27-29mm
Product size:D×L 产品尺寸：直径×长度						

CUP HEAD BLIND RIVETS

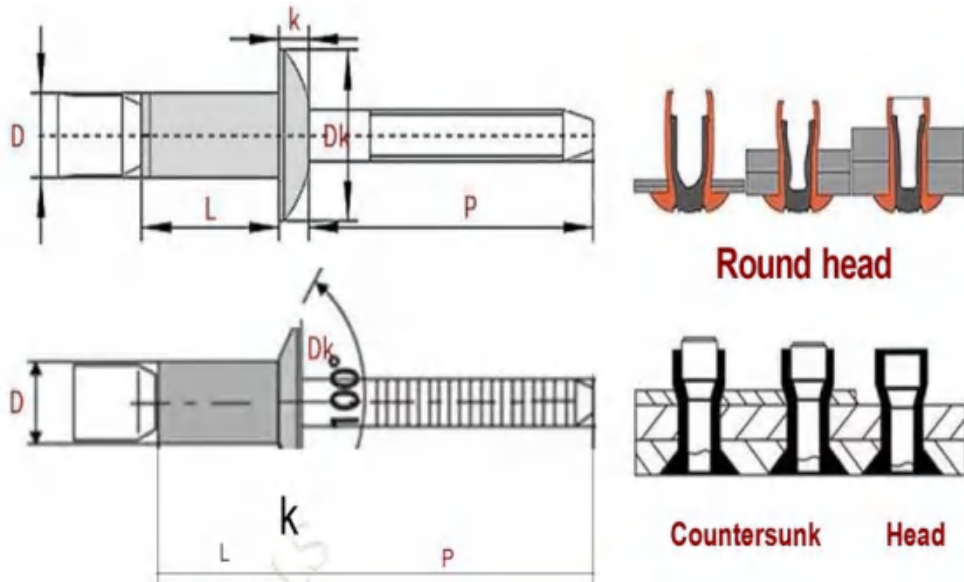

Round head						
Countersunk Head						
铆钉参数表 The Data Form Of The Rivet						
D 直径	L 长度	Grip Range 铆接范围	Hole Size 钻孔直径	DK 帽檐直径	k 帽檐厚度	p 尾杆
Φ 4. 8mm	12mm (沉头12mm)	1. 5-6. 5mm	Φ 5. 0mm	中9. 5±0. 25mm	2. 4	27-29mm
Φ 4. 8mm	16mm (沉头16mm)	1. 5-11mm	Φ 5. 0mm	Φ 9. 5±0. 25mm	2. 4	27-29mm
Φ 6. 4mm	14mm (沉头16mm)	2-9. 5mm	Φ 6. 7mm	Φ 13. 0±0. 25mm	3. 1	27-29mm
Φ 6. 4mm	20mm (沉头22mm)	2-16mm	Φ 6. 7mm	Φ 13. 0±0. 25mm	3. 1	27-29mm

Product size:D×L
产品尺寸：直径×长度

RIVETING TOOL



Hand movement
手动



Pneumatic
气动



Electric
电动




Name	Single steel riveting gun
Size	9 inches
Working gun cap	2.4/3.2/4.0/4.8
Using Materials	Aluminum rivet



Product model	ccp200	Working pull	1406KG
weight	1.5KG	Stroke	16MM
customized	Spot/Customized	volume	16*27CM
Inlet port	ZG1/4	Rivet material	Aluminum
Workingair pressure	6-8KG/CM2	Use rivet size	2.4/3.2/4.0/4.8



Product model	YC-30	Working pull	1406KG
weight	1.5KG	Stroke	22MM
customized	Spot/Customized	Size	81*210*300MM
Inlet port	ZG1/8	Rivet material	Aluminum/Steel/Stainless Steel
Workingair pressure	6-8KG/CM2	Use rivet size	2.4/3.2/4.0/4.8/6.4

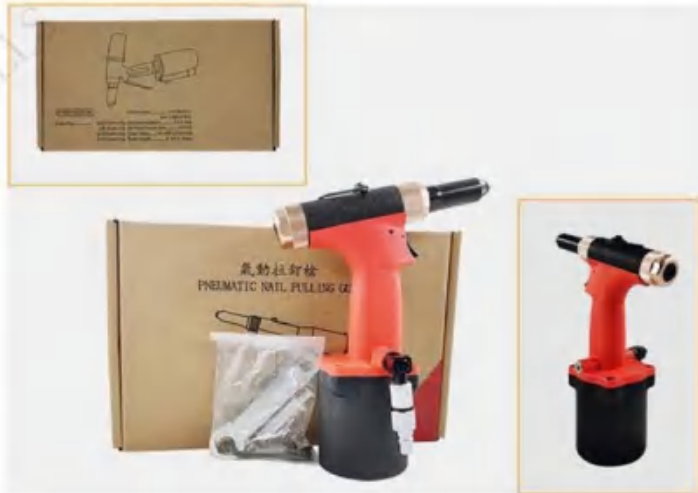



Product model	DY-128VF	Working pull	20000N
weight	1.5KG	Stroke	22MM
customized	Spot/Customized	Key	Mode/gear/, battery level
Lithium battery	15000mAh	Rivet material	Aluminum/Steel/ Stainless Steel
charger	1	Use rivet size	2.4/3.2/4.0/4.8

